

BASIC

Fully adjustable fall-arrest harness with a rear dorsal and front sternum attachment points.

DESCRIPTION


Rubber band for free ends of adjustable straps

Enhanced marking of front connection points, EN 361

Chest connection with patented Rock&Lock buckle

Gear loop with load of 5kg

All steel components finished with E - coating for higher corrosion resistance

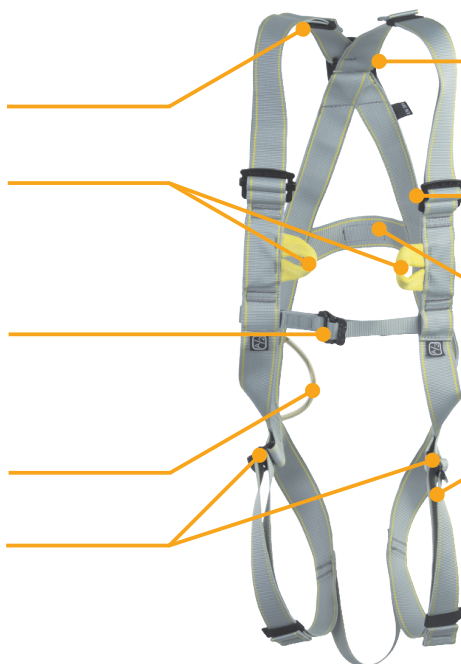

Flat rear attachment point does not affect comfort when wearing the backpack or breathing apparatus

Easy-Lock buckle provides easy size adjustment

Different colour of rear webbing for each size (S/M/L- grey, XL/XXL-yellow)

Easy-Lock buckle for fast leg loops adjustment

KEY PROPERTIES

- Lightweight and simple work harness
- Comfortable during a work
- Easy to adjust, easy to put on and off

STANDARDS

CE 1019

EN 361:2002

FEATURES



S/M/L – 820 g/29 oz
XL/XXL – 885 g/31 oz



guarantee




made in
Czech republic

MATERIAL COMPOSITION

- 34 % stainless steel
- 50 % PES
- 10 % PAD
- 6 % polyethylene


SIZE CHART




	S/M/L	XL/XXL
A [cm/in]	UNI	UNI
B [cm/in]	UNI	UNI
C [cm]	150–185	180–210
D [cm]	UNI	UNI

A - waist circumference; B - a circuit leg loops
C - body height; D - chest circumference

TECHNICAL DATA

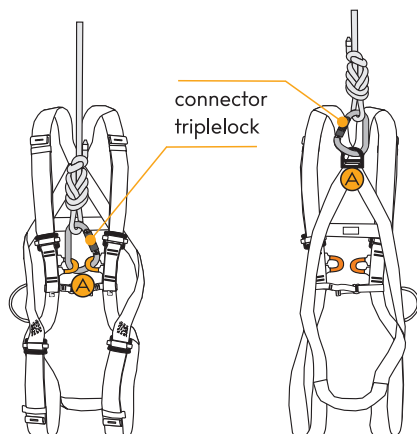

PPE against falls from a height.




dorsal rear D ring attachment point according to EN 361 labeled with A

front textile twin loops attachment point according to EN 361


labeled with
 $A/2 + A/2 = A$

Traceability label




- 1 – unique No.
- 2 – batch No.
- 3 – month/year of manufacture
- 4 – model
- 5 – size
- 6 – fall-arrest work harness
- 7 – conformity marking
- 8 – no. of notified body

Easy-Lock buckle



Rock & Lock buckle



RELATED PRODUCTS

- weight reduction 1025g to 885 g (S/M/L)
- front textile twin loops attachment according to EN 361
- one gear loop
- simple and breathable construction
- patented Rock&Lock buckle for easy fastening the harness



BODY II.



BASIC Light
W0090

Product life is not strictly determined by the manufacturer. Depending on the condition of the product and the history of its use, it may be necessary to withdraw it from the service immediately.

The maximum useful life from date of manufacture including the storage is 15 years.



washing



drying



beware of salt




beware of UV




chrňte před
chemikáliemi




read
instruction

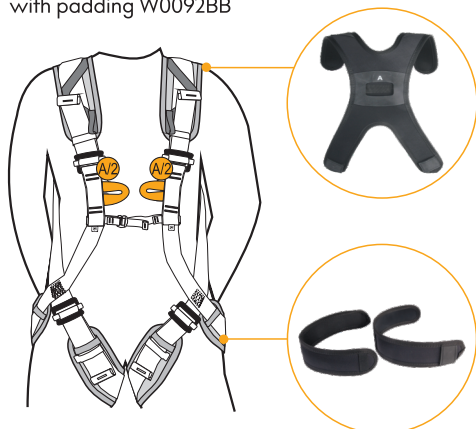Possible combination
with padding W0092BB

Vhodný pro kombinaci
s polohovacím pásem Pole II. W0073

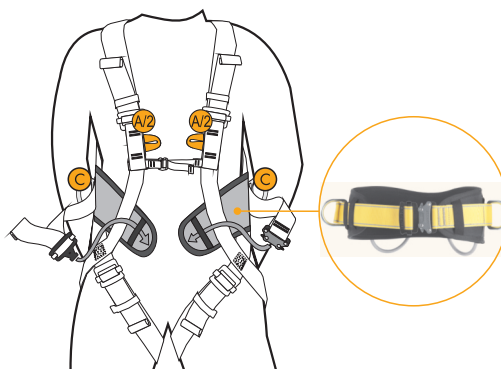

Can be used with
Suspension Trauma Safety Strap
W1029BX

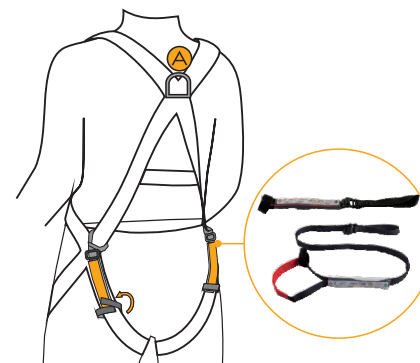

NOTES